

Product Description

Topilene® J1145T is a polypropylene impact copolymer manufactured with high flowability and optimized balance of stiffness and toughness. Typical customer applications are injection molding of automotive parts, electrical appliances parts, Thin-walled packaging and housewares like chopping boards.

Characteristics

Typical Application Cooling & Dishwashing appliances, Housewares, Opaque containers, Washing appliances

Features Fast cycle(Production) / Good impact resistance

Typical Properties

| Characteristics | Method | Value | Unit |
|-------------------------------------------------------|------------|---------------|--------------------|
| Physical | | | |
| Melt Index(230°C, 2.16kg) | ASTM D1238 | 70 | g/10min |
| Density | ASTM D792 | 0.90 | g/cm ³ |
| Mechanical | | | |
| Tensile Strength at Yield | ASTM D638 | 270 | kg/cm ² |
| Flexural Modulus | ASTM D790 | 15,000 | kg/cm ² |
| Notched Izod Impact Strength(23°C) | ASTM D256 | 8.0 | kg-cm/cm |
| Rockwell Hardness | ASTM D785 | 100 | R-scale |
| Thermal | | | |
| Vicat Softening point (1kgf) | ASTM D1525 | 155 | °C |
| Heat Deflection Temperature (4.6kgf/cm ²) | ASTM D648 | 120 | °C |

The values listed above are typical values for reference purpose only and shall not be construed as specifications.

Processing Conditions

Contacts

Head Office

Lot 01CN ~ 08CN, Cai Mep Industrial Park,
Tan Phuoc Ward, Phu My Town, Ba Ria Vung Tau
Province, Vietnam.


Tel: +84-254-393-7949 Fax: +84-254-393-7849

Online

www.hyosungchemical.com

www.topilene.com



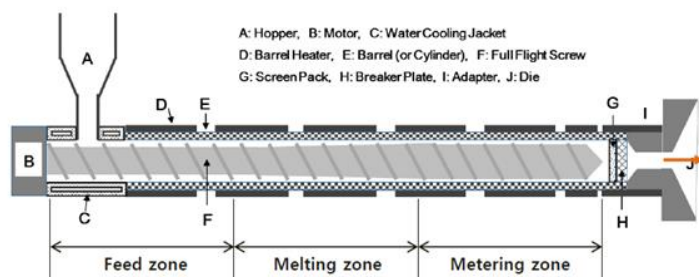

| Specifications | Unit | Recommended Conditions |
|--------------------|------|------------------------|
| Nozzle Temperature | °C | 230 ~ 250 |
| Front Temperature | °C | 230 ~ 250 |
| Middle Temperature | °C | 230 ~ 250 |
| Rear Temperature | °C | 220 ~ 240 |
| Screw Speed | rpm | 60 ~ 70 |

Considerations

Due to variations in screw design and heat efficiency according to types of facilities, optimal conditions for each facility may differ. Therefore, the optimal temperature conditions for each facility must be taken into consideration depending on extruding pressure, cooling efficiency, changes in MI of the final product, appearances of the final product, etc.

Health, Safety and Food Contact Regulations

Topilene® J1145T complies with FDA requirements in the code of Federal Regulations in 21 CFR 177. 1520 for food contact and European Commission Regulation (EU) No 10/2011 and its amendment (EU) No 2016 / 1416 with regard to plastic materials and articles intended to come into contact with food.

Storage and Handling

This product should be stored in dry condition at temperature below 40°C and protected from UV-light. When condensation is visible or can be expected, pre-drying is recommended. (Drying condition: 80~100°C/2~4hours at air circulated condition)

Disclaimer

Contacts

Head Office

Lot 01CN ~ 08CN, Cai Mep Industrial Park,
Tan Phuoc Ward, Phu My Town, Ba Ria Vung Tau
Province, Vietnam.

Tel: +84-254-393-7949 Fax: +84-254-393-7849

Online

www.hyosungchemical.com
www.topilene.com



Polypropylene Block Copolymer
For TWIM Applications

All information, including product characteristics, applications and properties are for reference purpose only and shall not be construed as specifications. Before using this product, customers should carefully review the instructions for use of the product to determine whether the product is suitable for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of this product. HYOSUNG VINA CHEMICALS CORPORATION assumes no legal responsibility or liability for the contents of this document. We reserve the right to change the contents of this document without prior notice. This document is copyrighted by HYOSUNG VINA CHEMICALS CORPORATION. *Topilene®* is a registered trademark owned or used by HYOSUNG VINA CHEMICALS CORPORATION.

Contacts

Head Office

Lot 01CN ~ 08CN, Cai Mep Industrial Park,
Tan Phuoc Ward, Phu My Town, Ba Ria Vung Tau
Province, Vietnam.

Tel: +84-254-393-7949 Fax: +84-254-393-7849

Online

www.hyosungchemical.com
www.topilene.com

